

MEDO Brand Air Blower
For aerobic sewage treatment systems and aquatics


NEW Model **LA-60ECO**

Eco-Friendly Type Blower

- 45% Less Power Consumption
- Reduced Carbon Footprint (CO₂)
- Reduced Dimensions
- Low Noise; Whisper Quiet
- Linear-Shuttle Design (no diaphragms)
- Unsurpassable Performance and Lifetime
- Easy Maintenance

The unit's footprint is one-half smaller than the LA-60B.


Side View

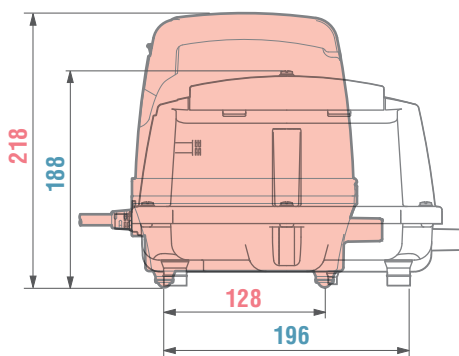

LA-60ECO
288cm²

LA-60B
582cm²


Top View

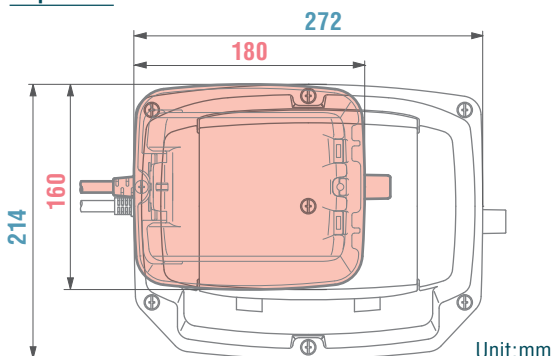

Unit:mm





Comparison of Power Consumption Reduced by 45%

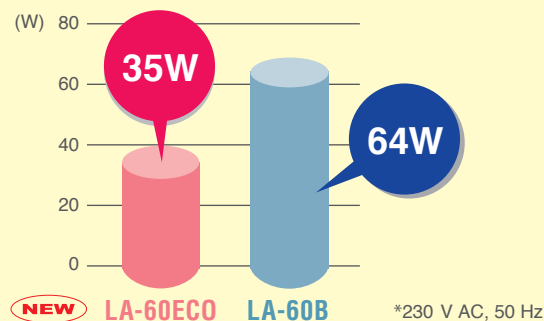


*230 V AC, 50 Hz

Specifications

Model	LA-60ECO
Power Supply	230 V AC
Rated Frequency	50 Hz
Rated Airflow	60 L/min
Rated Pressure	14.7 kPa (0.15 kgf/cm ²)
Power Consumption	35 W
Coil Insulation Class	E type equivalent
Mounting Dimensions	216(L)×160(W)×218(H)mm
Gross Weight	4.3kg

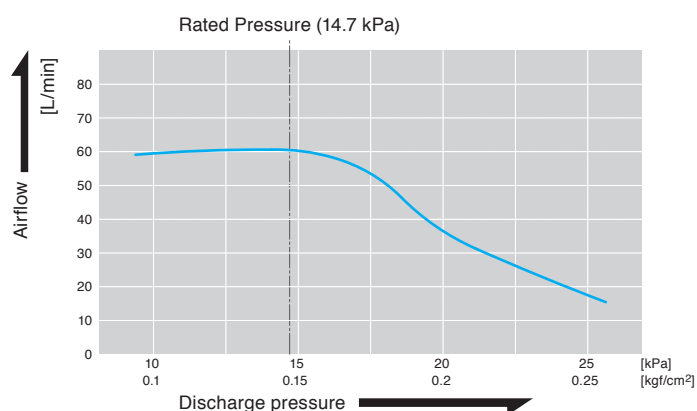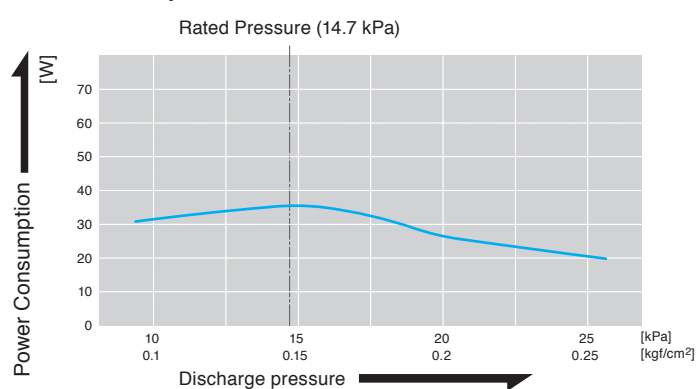**Airflow Characteristics****Power Consumption Characteristics**

*The above characteristic curves are presented for reference only and not guaranteed.

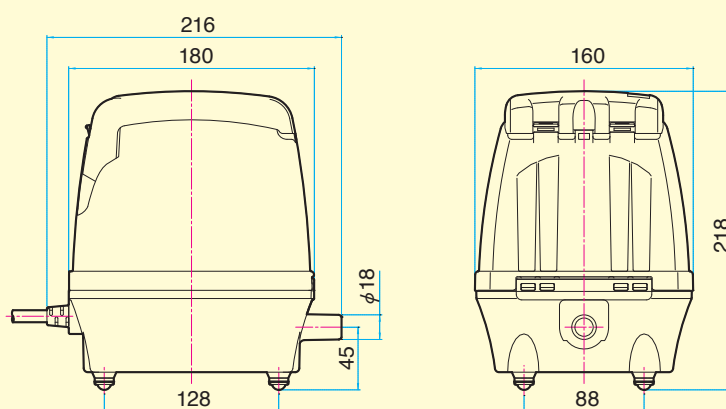Sketch Drawing and Mounting Dimensions Diagram

Unit : mm

**Head Office**

9-4, Nakaikegami 2-chome, Ohta-ku, Tokyo 146-8555 Japan

Tel : +81-3-3755-1111 Fax : +81-3-3753-8791

E-mail : overseas @ nitto-kohki.co.jp

Web www.nitto-kohki.co.jp/e

DISTRIBUTED BY



This catalog is printed using environmentally friendly paper and vegetable oil inks.