


Vacuum Pump

Model VP0625



Airflow & Power Consumption

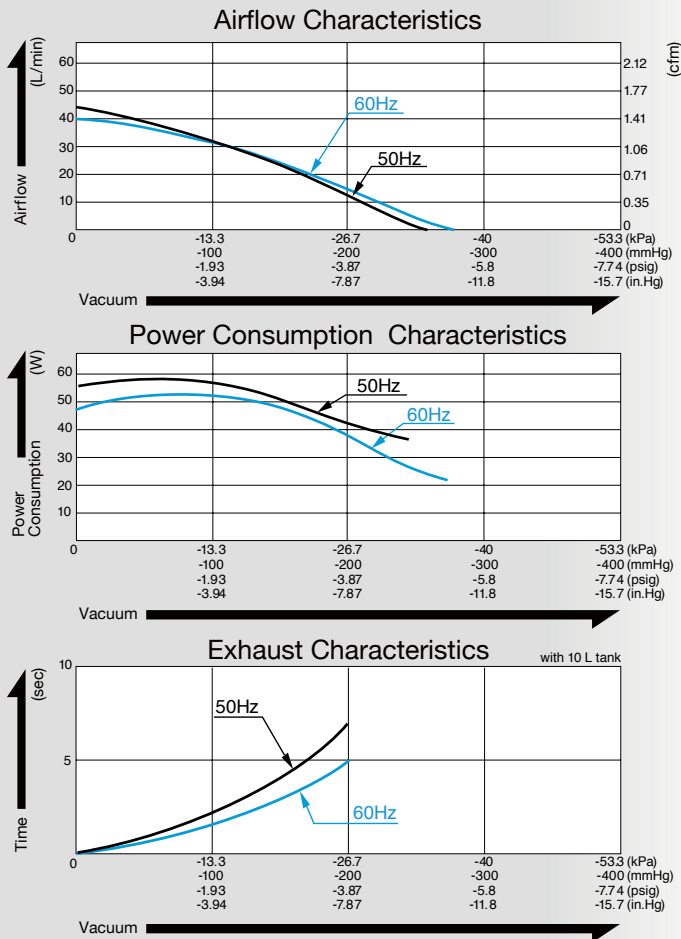


Specifications

| | | |
|-----------------------|--|---------------------|
| Attainable Vacuum | -33.3 kPa (-250 mmHg) -333 mbar -9.84 in. Hg | |
| Free Air Displacement | 40 L/min 1.41 cfm | |
| Rated Voltage | 115 V AC | 230 V AC |
| Power Consumption | 60 W | |
| Rated Frequency | 60 Hz | 50 Hz |
| Rated Performance | 10,000 hours | |
| Inlet | 15mm O.D. hose barb | |
| Outlet | ISO Rc 1/4 | |
| Duty Cycle | Continuous | |
| Coil Insulation Class | E or its equivalent (JETL) and B for UL | |
| Mounting Dimensions | 68 (L) x 84 (W) mm 2-43/64" (L) x 3-5/16" (W) | |
| Weight | 3 kg 6.6 Lbs | |
| Leadwire Length | 235 mm 9-1/4" | 320 mm 12-19/32" |


Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.

Application Examples

Microfiche Camera



Solar Collection Screen



Dimensional Outline Drawing (Unit: mm)

