


# Vacuum Pump

## Model VP0645



### Airflow & Power Consumption

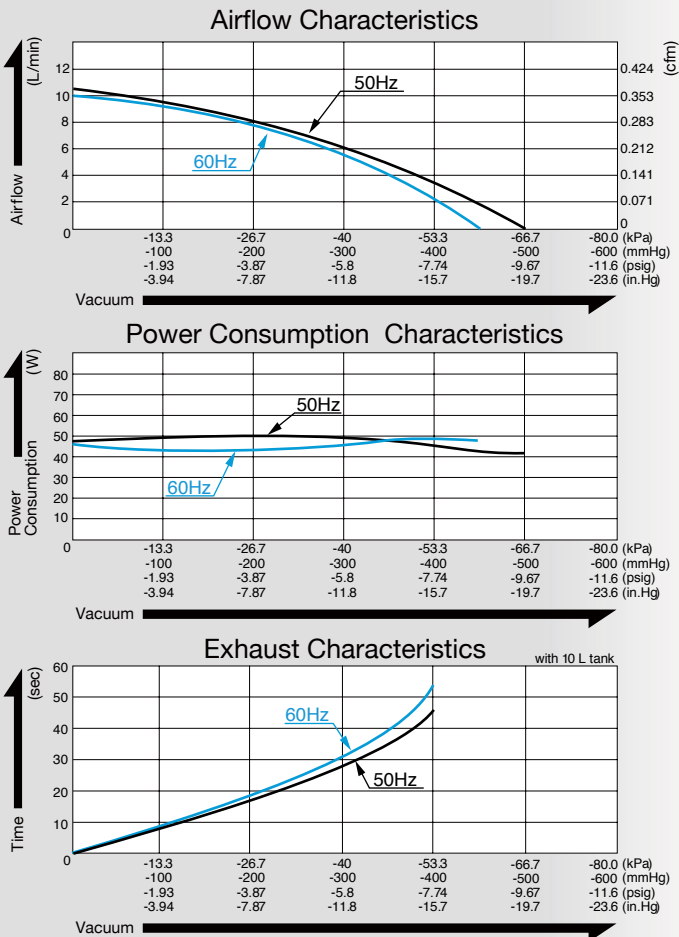


### Specifications

Attainable Vacuum *1	-60 kPa (-450 mmHg) -600 mbar -17.7 in. Hg	
Free Air Displacement	10 L/min 0.35 cfm	
Rated Voltage	115 V AC	230 V AC
Power Consumption	48 W	50 W
Rated Frequency	60 Hz	50 Hz
Rated Performance	3,000 hours	
Inlet	15 mm O.D. hose barb	
Outlet	ISO Rc 1/4	
Duty Cycle	Continuous	
Coil Insulation Class	E or its equivalent (JETL)	
Mounting Dimensions	68 (L) x 84 (W) mm 2-43/64" (L) x 3-5/16" (W)	
Weight	3.2 kg 7.1 Lbs	
Leadwire Length	200 mm 7-7/8"	

\*1: Operations at higher than -60kPa need an additional leak valve or relief valve on the inlet piping. Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.

### Application Examples

#### Liquid Purification



### Dimensional Outline Drawing (Unit: mm)

