


Vacuum Pump

Model VPO660



Airflow & Power Consumption

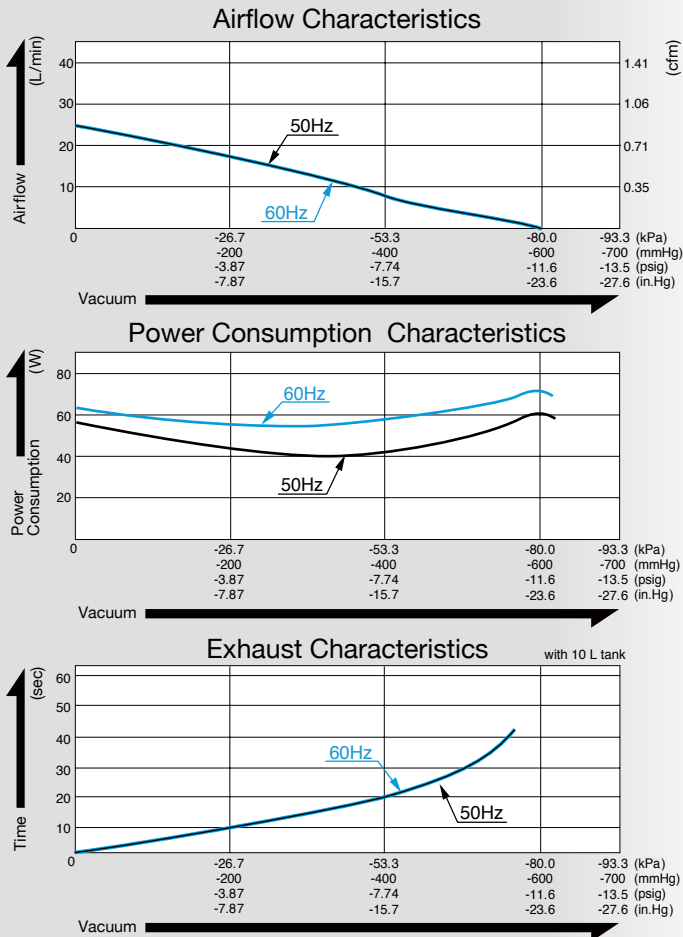


Specifications

Attainable Vacuum *1	-80 kPa (-600 mmHg) -800 mbar -23.6 in. Hg	
Free Air Displacement	25 L/min 0.88 cfm	
Rated Voltage	115 V AC	230 V AC
Power Consumption	70 W	60 W
Rated Frequency	60 Hz	50 Hz
Rated Performance	6,000 hours	
Inlet	ISO Rc 1/4	
Outlet	ISO Rc 1/4	
Duty Cycle	Continuous	
Coil Insulation Class	E or its equivalent (JETL) and B for UL	
Mounting Dimensions	102 (L) x 130 (W) mm 4-1/64" (L) x 5-1/8" (W)	
Weight	5 kg 11 Lbs	
Leadwire Length	300 mm 11-13/16"	600 mm 23-5/8"


*1: Operations at higher than -53.5kPa need an additional leak valve or relief valve on the inlet piping. Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.

Application Examples

Vacuum Material Handling Equipment



Vacuum Chucking



Dimensional Outline Drawing (Unit: mm)

