

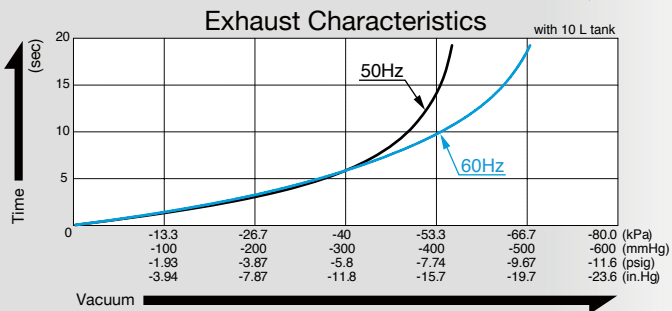


# Vacuum Pump

## Model VP0940

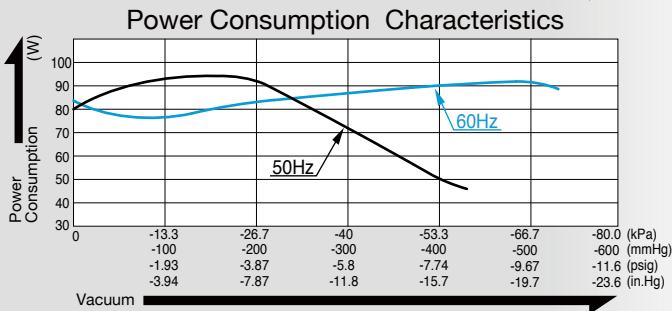

### Airflow & Power Consumption

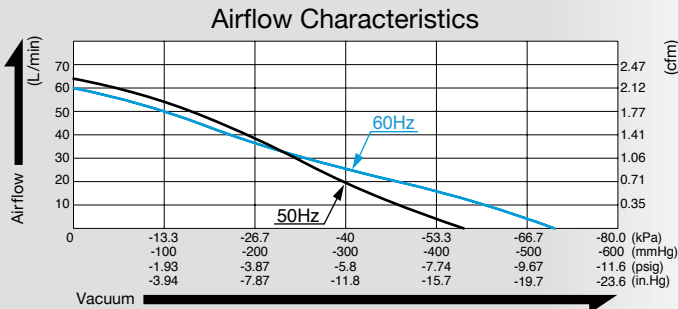


### Specifications

Attainable Vacuum *1	-53.3 kPa (-400 mmHg) -533 mbar -15.7 in. Hg	
Free Air Displacement	60 L/min 2.12 cfm	
Rated Voltage	115 V AC	230 V AC
Power Consumption	95 W	
Rated Frequency	60 Hz	50 Hz
Rated Performance	10,000 hours	
Inlet	ISO Rc 1/4	
Outlet	ISO Rc 1/4	
Duty Cycle	Continuous	
Coil Insulation Class	B or its equivalent (JETL) and B for UL	
Mounting Dimensions	102 (L) x 130 (W) mm 4-1/64" (L) x 5-1/8" (W)	
Weight	4.55 kg 10.0 Lbs	
Leadwire Length	300 mm 11-13/16"	320 mm 12-19/32"

\*1: Operations at higher than -53.3kPa need an additional leak valve or relief valve on the inlet piping. Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.

### Application Examples

#### Label Sticking Machine



### Dimensional Outline Drawing (Unit: mm)

